




1. Ensure all hardware is present. You should have everything pictured here.

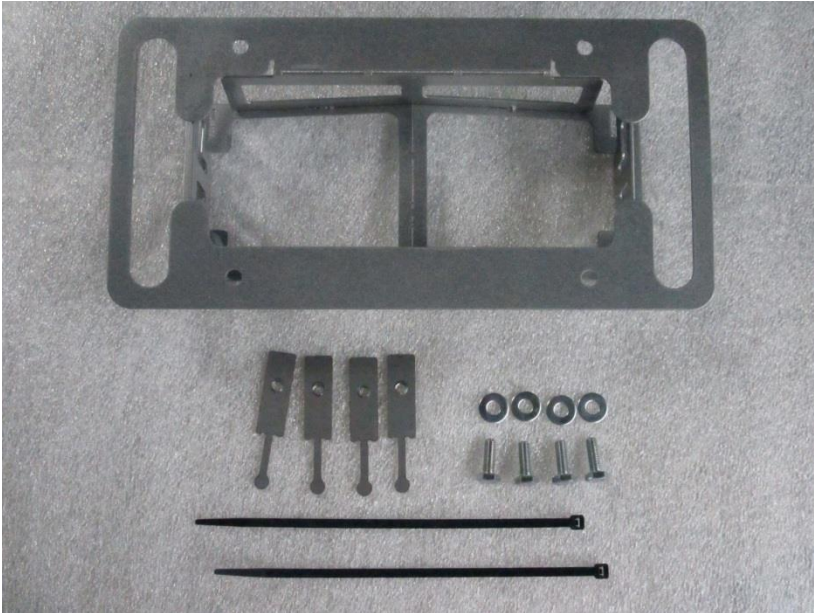

2. Start off by bending all sheet metal nuts at a 45 degree angle like so.

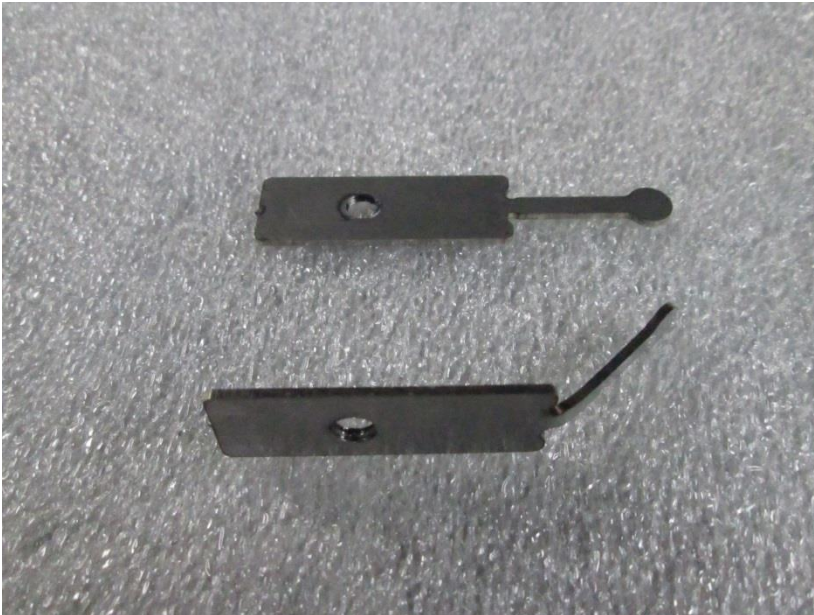

3. Bend the end of both zip ties. Only one will be used but the second is in case the first one fails.

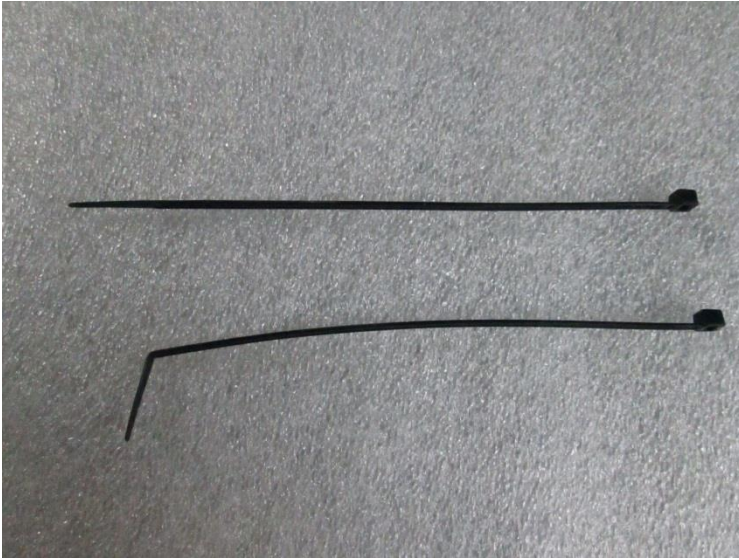

4. Place the license plate bracket in the center of the lower grille. Use the zip tie to hold the bracket in place.



5. Use the small tab on the sheet metal nuts as a handle while installing the bolts. Ensure the washers are placed between the bolt and the license plate bracket.



6. Tighten the bolts with a 7/16" wrench and cut off zip tie.

